




### Full Vertical Wrap Mount:

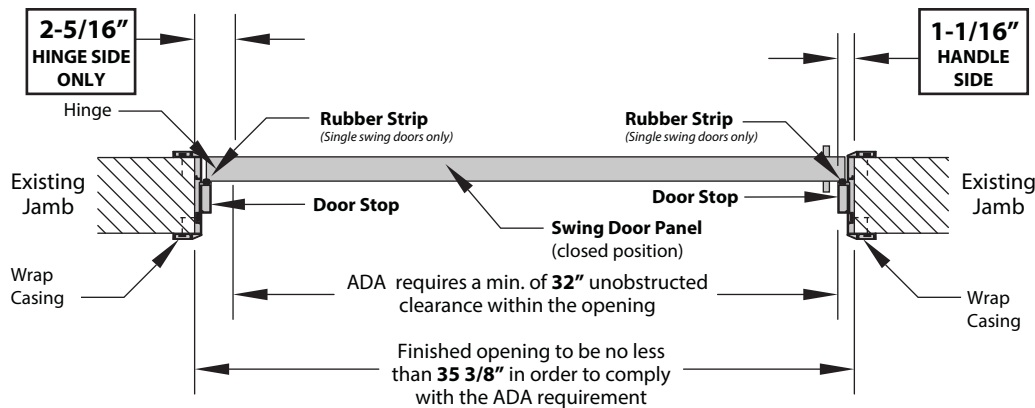

### Partical Vertical Wrap Mount:

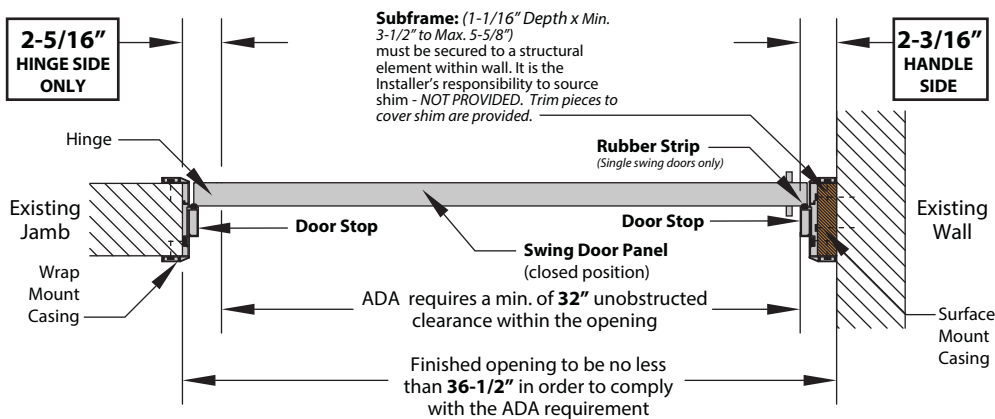

### Full Surface Mount:

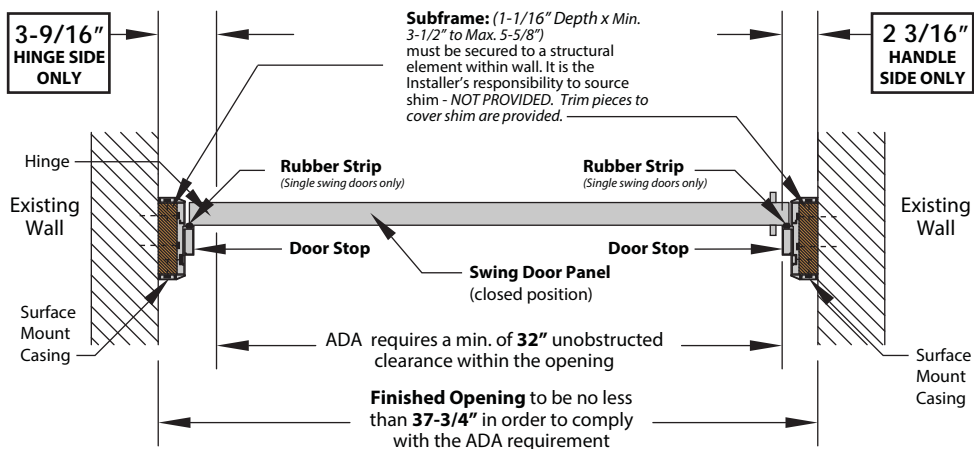


### ADA Requirements:

**4.13.5 Clear Width.** Doorways shall have a minimum clear opening of 32 in (815 mm) with the door open 90 degrees, measured between the face of the door and the opposite stop. Openings more than 24 in (610 mm) in depth shall comply with 4.2.1 and 4.3.3.

**EXCEPTION:** Doors not requiring full user passage, such as shallow closets, may have the clear opening reduced to 20 in (510 mm) minimum.

### Door Swing:



### Swing Door Side Identifier:

To determine swing direction, stand on side A - the front of the door.

- 1) the glossy/front side of the glass **or**
- 2) if the glass is laminated or clear, Side A is the outside of the room/ larger of the two spaces the door is dividing.

