

Suspended System Required Structural Conditions for Frameless Barn Doors


Frameless Glass Barn Door Systems Require:

- 1 Surface Mount Opening - Single Panel:
Panel coverage up to 60" wide x 120" high requires continuous 4x8 wood header for new construction and 4x4 wood blocking for existing structures.
- 2 Surface Mount Opening - Double Panel:
Panel coverage up to 120" wide x 120" high requires continuous 4x8 wood header for new construction and 4x4 wood blocking for existing structures.

Frameless Glass Barn Door System:


1 Surface Mount Opening - Single Panel:

Up to 60" W Panel Coverage x 120" H requires continuous 4x8 wood header for **New Construction only**

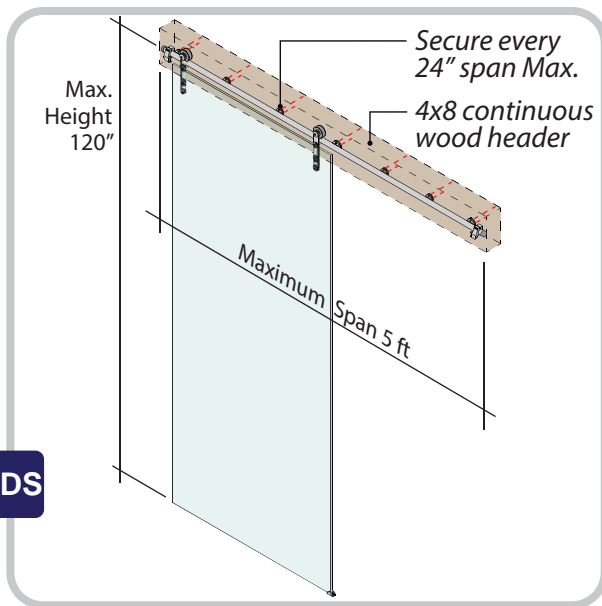

Surface Mount Opening - Single Panel:

Up to 60" W Panel Coverage x 120" H requires continuous 4x4 wood blocking for **Existing Structures only**


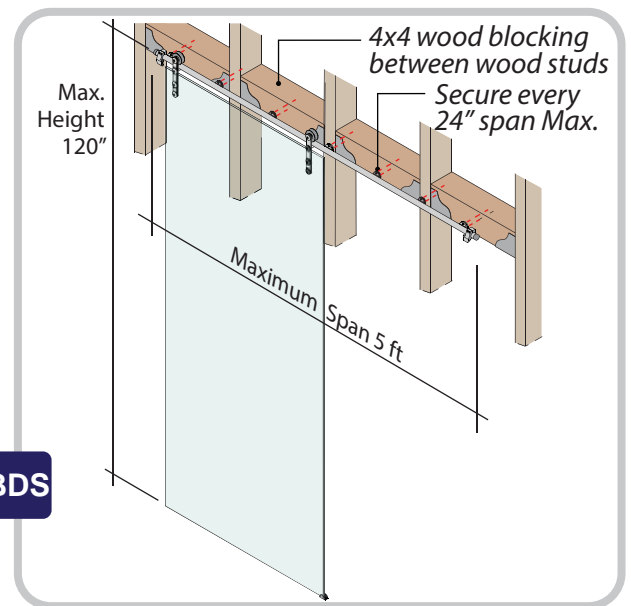


2 Surface Mount Opening - Double Panel:

Up to 120" W Panel Coverage x 120" H requires continuous 4x8 wood header for **New Construction only**

Surface Mount Opening - Double Panel:

Up to 120" W Panel Coverage x 120" H requires continuous 4x4 wood blocking for **Existing Structures only**

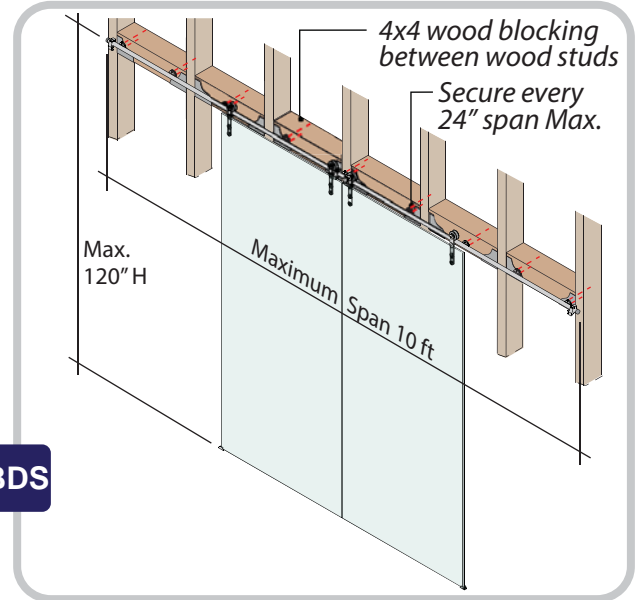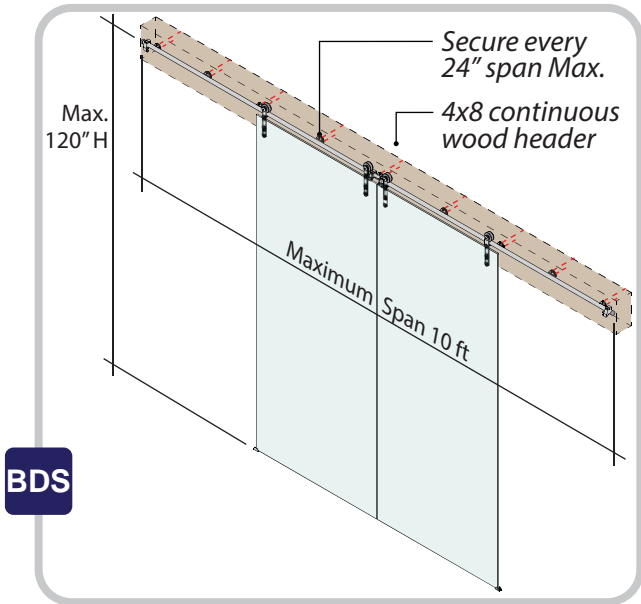

***For clients whose installations require larger openings, full ownership for required continuous wood backing is the sole responsibility of the client and their contractor/installer.*

This is to acknowledge that I have read, reviewed, and understand the Suspended System structural requirements and conditions and take full ownership for providing the required continuous wood header.

Print Name

Signature

Date