

FOR INTERNAL USE AS A GUIDELINE ONLY, NOT FOR PUBLICATION

Suspended System Required Structural Conditions for Pocket Doors



Suspended Systems Require:

- 1 Top Mount Opening - Single or Double Track: **(Please Note: For open construction projects only)**
Panel coverage up to 72" wide x 108" high requires continuous 4x4 wood header.
- 2 Top Mount Opening - Single or Double Track: **(Please Note: For open construction projects only)**
Panel coverage up to 144" wide x 108" high requires continuous 4x8 wood header.

SS - Structural Requirements for Suspended Pocket Door Systems: (Requires open construction)

- 1 **Top Mount - Single or Double Track Pocket:**
Up to 72" W Panel Coverage x 108" H requires continuous 4x4 wood header

- 2 **Surface Mount - Single or Double Track Pocket:**
Up to 144" W Panel Coverage x 108" H requires continuous 4x8 wood header

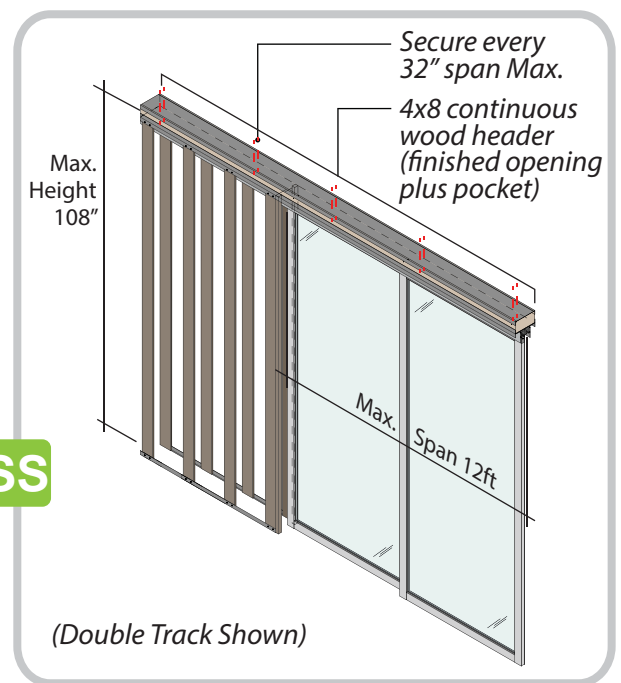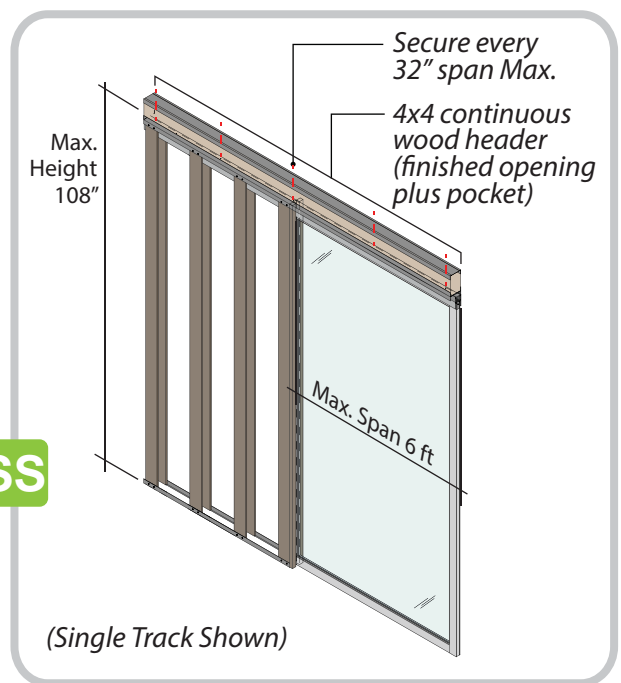

***For clients whose installations require larger openings, full ownership for required continuous wood backing is the sole responsibility of the client and their contractor/installer.*

This is to acknowledge that I have read, reviewed, and understand the Suspended System structural requirements and conditions and take full ownership for providing the required continuous wood header.

Print Name

Signature

Date