

## Suspended System Required Structural Conditions for Suspended Barn Doors

Suspended Barn Door Systems Require:

- 1 Surface Mount Opening - Single Track - Single Panel:  
Panel coverage up to 72" wide x 112" high requires continuous 4x8 wood header for new construction and 4x4 wood blocking for existing structures.
- 2 Surface Mount Opening - Single Track - Double Panel:  
Panel coverage up to 72" wide x 112" high requires continuous 4x8 wood header for new construction and 4x4 wood blocking for existing structures.



### Suspended Barn Door System:

#### 1 Surface Mount Opening - Single Panel Barn Door:

Up to 72" W Panel Coverage x 112" H requires continuous 4x8 wood header for **New Construction only**


#### Surface Mount Opening - Single Panel Barn Door:

Up to 72" W Panel Coverage x 112" H requires continuous 4x4 wood blocking for **Existing Structures only**

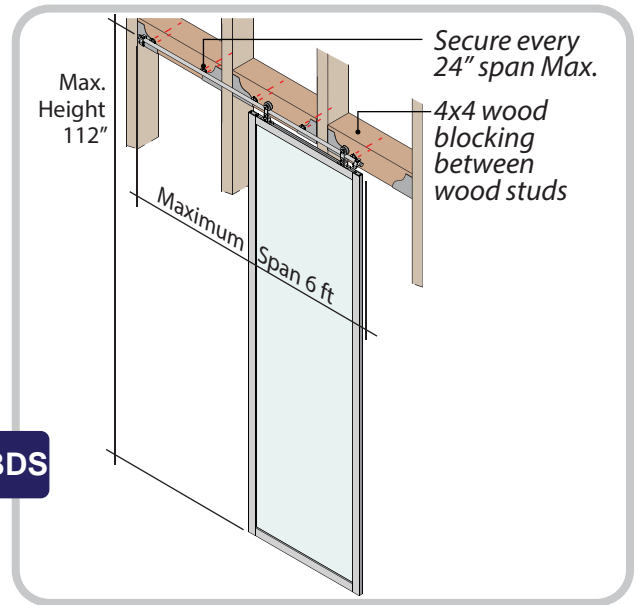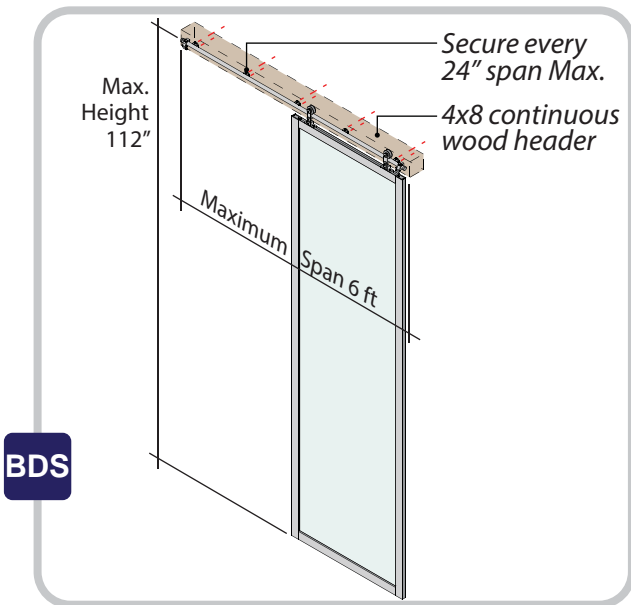


**2 Surface Mount Opening - Double Panel Barn Door:**

Up to 144" W Panel Coverage x 112" H requires continuous 4x8 wood header for **New Construction only**

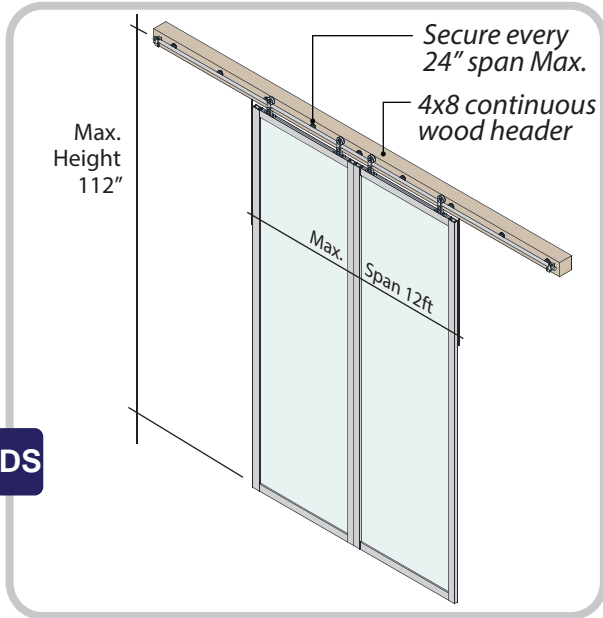

**Surface Mount Opening - Double Panel Barn Door:**

Up to 144" W Panel Coverage x 112" H requires continuous 4x4 wood blocking for **Existing Structures only**

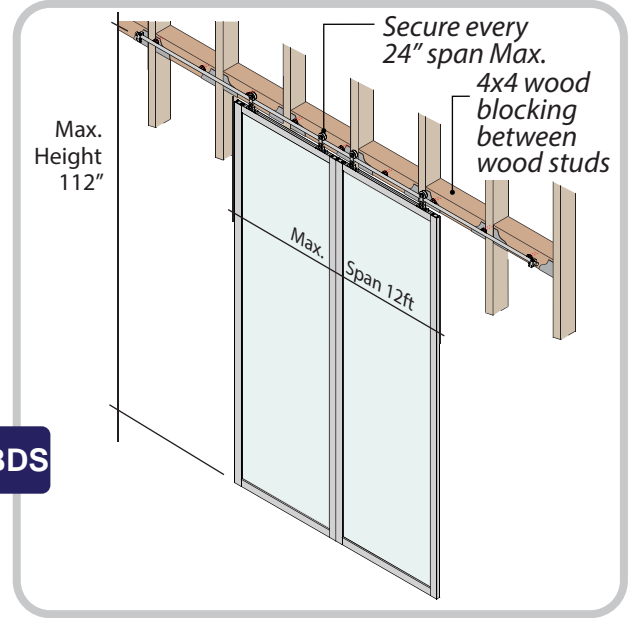

*\*\*For clients whose installations require larger openings, full ownership for required continuous wood backing is the sole responsibility of the client and their contractor/installer.*

This is to acknowledge that I have read, reviewed, and understand the Suspended System structural requirements and conditions and take full ownership for providing the required continuous wood header.

Print Name

Signature

Date