

Suspended System Required Structural Conditions

Suspended Systems Require:

- 1 Top Mount Opening - Double Track: *(Please Note: For residential projects, only offered on new construction, remodels, and pocket doors. Verification of continuous wood header is required.)*
Panel coverage up to 72" wide x 108" high requires continuous 4x4 wood header.
- 2 Top Mount Opening - Double Track: *(Please Note: For residential projects, only offered on new construction, remodels, and pocket doors. Verification of continuous wood header is required.)*
Panel coverage up to 144" wide x 108" high requires continuous 4x8 wood header.
- 3 Top Mount Opening - Triple Track: *(Please Note: For residential projects, only offered on new construction, remodels, and pocket doors. Verification of continuous wood header is required.)*
Panel coverage up to 144" wide x 108" high requires continuous 8x8 wood header.
- 4 Top Mount Opening - Quad Track: *(Please Note: For residential projects, only offered on new construction, remodels, and pocket doors. Verification of continuous wood header is required.)*
Panel coverage up to 144" wide x 108" high requires continuous 8x8 wood header.
- 5 Surface Mount Opening - Single Track: *(Page 2)*
Panel coverage up to 72" wide x 108" high requires continuous 4x4 wood header for new construction and 4x4 wood blocking for existing structures.
Panel coverage up to 144" wide x 108" high requires continuous 4x8 wood header for new construction and 4x4 wood blocking for existing structures.

***For clients whose installations require larger openings, full ownership for required continuous wood backing is the sole responsibility of the client and their contractor/installer.*

This is to acknowledge that I have read, reviewed, and understand the Suspended System structural requirements and conditions and take full ownership for providing the required continuous wood header.

Print Name


Signature

Date

SS - Suspended System:


1 Top Mount Opening - Double Track:

Up to 72" W Panel Coverage x 108" H requires continuous 4x4 wood header

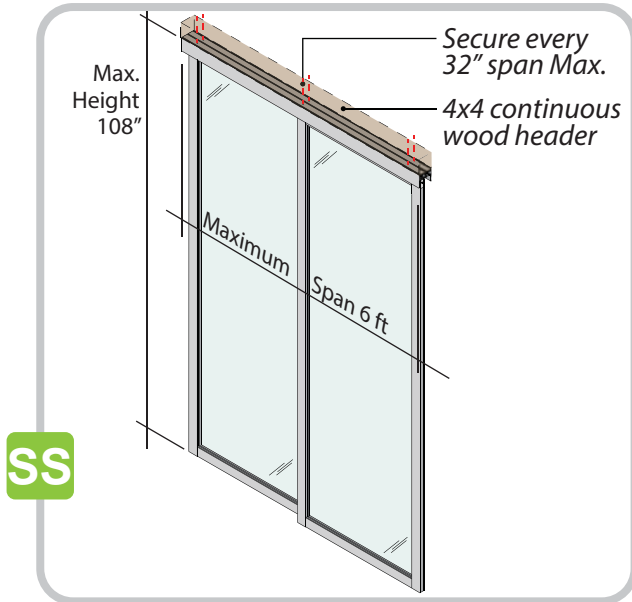


2 Top Mount Opening - Double Track:

Up to 144" W Panel Coverage x 108" H requires continuous 4x8 wood header

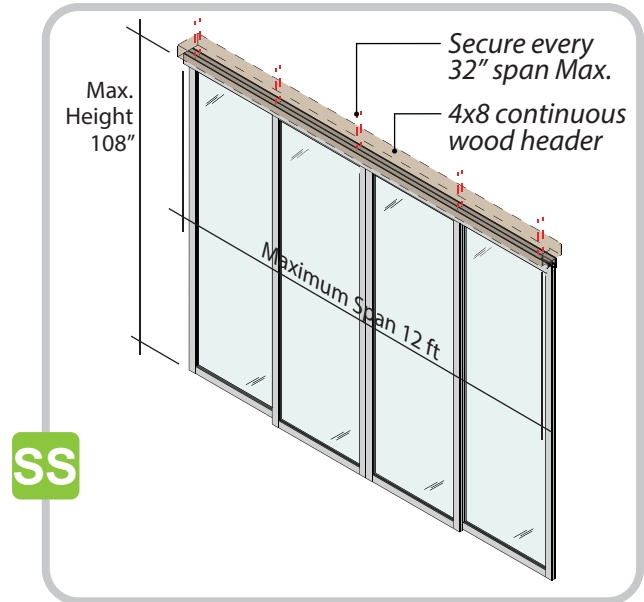


3 Top Mount Opening - Triple Track:

Up to 144" W Panel Coverage x 108" H requires continuous 8x8 wood header

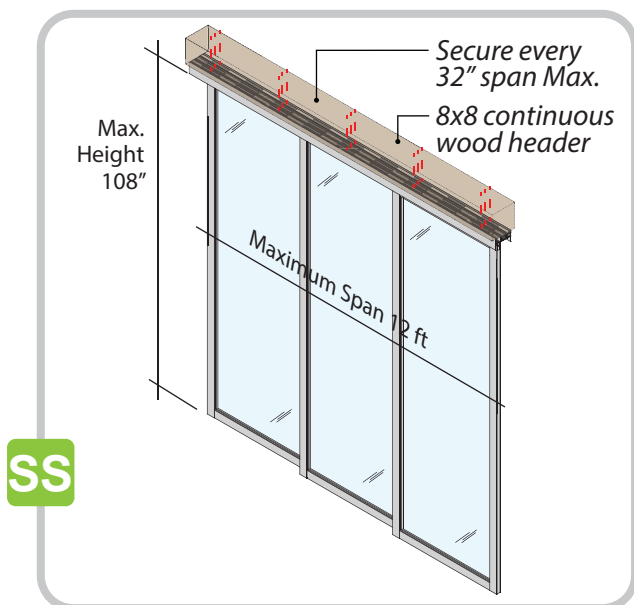

4 Top Mount Opening - Quad Track:

Up to 144" W Panel Coverage x 108" H requires continuous 8x8 wood header

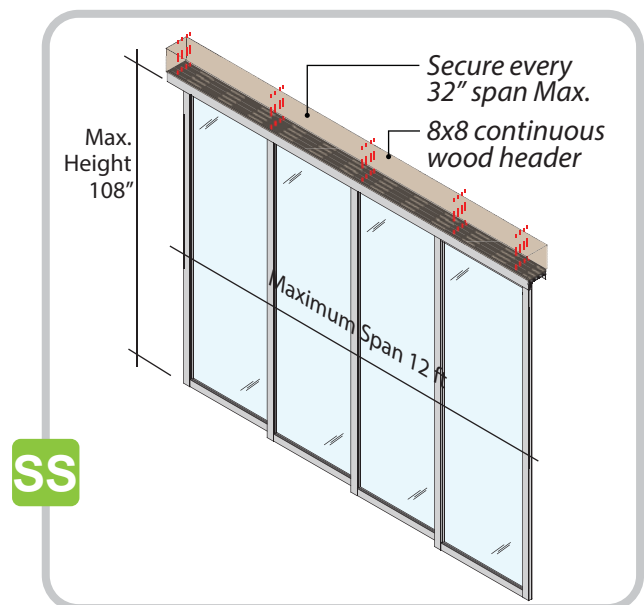

5 SS - Surface Mount - Single Track:

Up to 72" W Panel Coverage x 108" H requires continuous 4x4 wood header for **New Construction only**




SS - Surface Mount - Single Track:

Up to 72" W Panel Coverage x 108" H requires continuous 4x4 wood blocking for **Existing Structures only**




Surface Mount - Single or Double Track:

Up to 144" W Panel Coverage x 108" H requires continuous 4x8 wood header for **New Construction only**

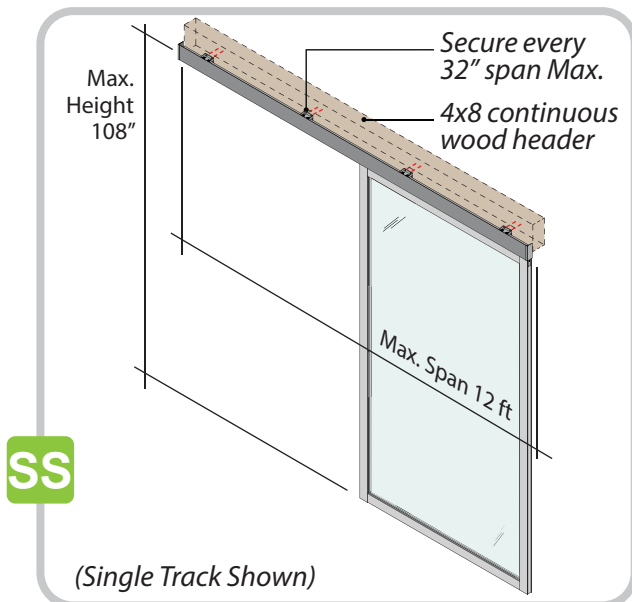


Surface Mount - Single or Double Track:

Up to 144" W Panel Coverage x 108" H requires continuous 4x4 wood blocking for **Existing Structures only**

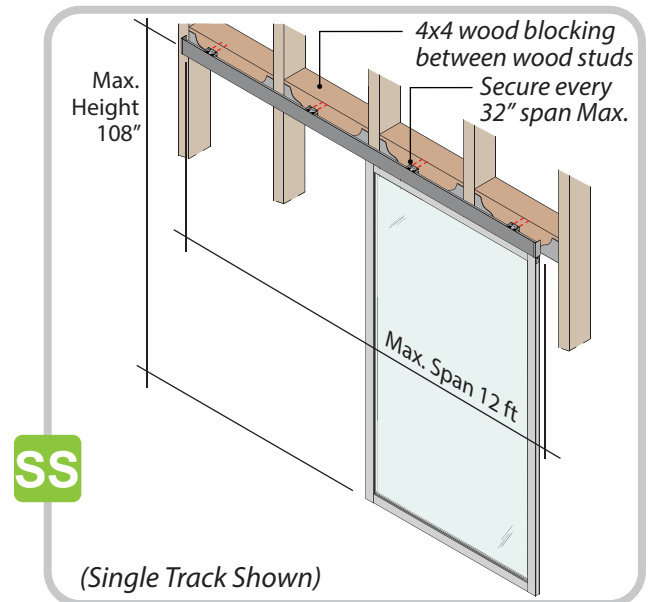

Surface Mount - Single or Double Track:

Up to 144" W Panel Coverage x 108" H requires continuous 4x8 wood header for **New Construction only**

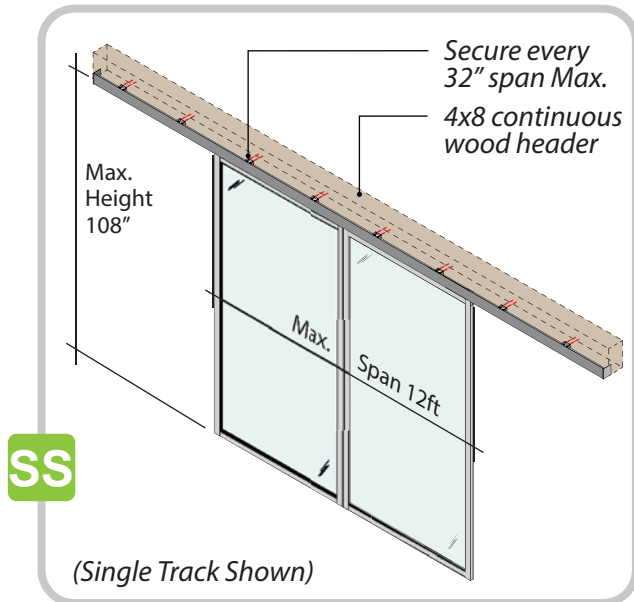

Surface Mount - Single or Double Track:

Up to 144" W Panel Coverage x 108" H requires continuous 4x4 wood blocking for **Existing Structures only**

